

FILTER FANS

Washdown filter fan system (NEMA 4/4X)



Visit
www.eurobex.com
for details.

Call us
toll free
1-800-363-2423




Quick Features :

- Housing made of steel or stainless steel
- The steel fans are painted gray (custom colors available)
- The stainless steel fans are brushed
- The kits include the filter fan and the exhaust module
- For use in harsh environments, where the filter fan system may be subject to washdowns or for severe outdoor applications
- Electrostatically charged polypropylene filter traps particles as small as 10 microns
- Electric connection via a power cord (included)
- UL, cUL

Technical Data :

Dimensions (H x W x D) : 457mm X 267mm X 127mm (imperial sizes on drawing)
 Max. operating temperature : 55°C
 Free blowing air volume : 263m³/h
 Protection degree : NEMA 4 (steel units) / NEMA 4X (stainless steel units)
In order to ensure the system's integrity the supplied gasket must be properly installed, as shown below. This filter fan system should be used exclusively with NEMA 4 or NEMA 4X cabinets.

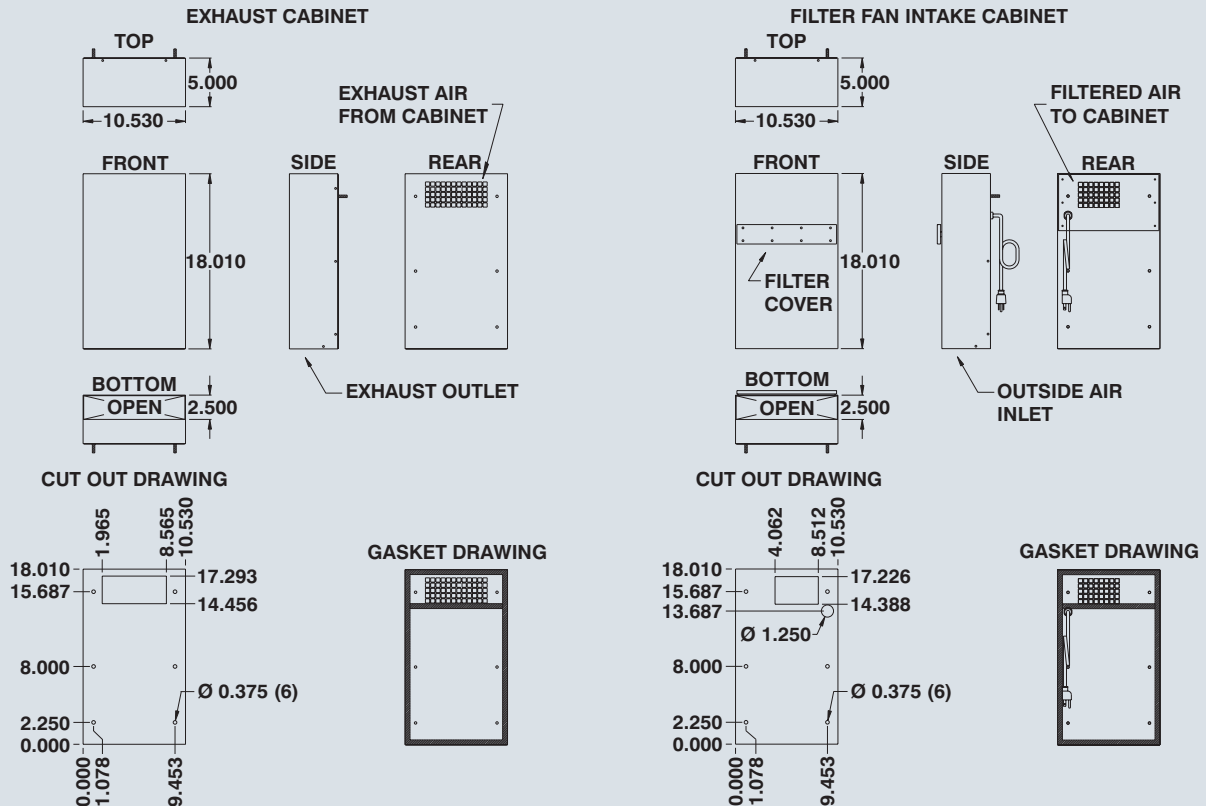

CATALOG NUMBER †	VOLTAGE	MAX. AMPS	AIRFLOW DIRECTION	REPLACEMENT FILTER	HOUSING MATERIAL	SHIPPING WEIGHT
IQ150FPW-126	AC 115V	1.90A	Intake only	WFIL	Painted steel	31
IQ150FPW-236	AC 230V	0.75A	Intake only	WFIL	Painted steel	31
IQ150FPW-126-SC	AC 115V	1.90A	Intake only	WFIL	Stainless steel	31
IQ150FPW-236-SC	AC 230V	0.75A	Intake only	WFIL	Stainless steel	31

† Part numbers include the filter fan and the exhaust filter.

Data subject to change without notice.