



## Oil & dust tight lift off cover stainless steel enclosures

The 5412 ESSLC lift off cover, water oil and dust tight enclosures are used indoors or outdoors, in areas where a corrosion problem may exist or where the enclosures may be subjected to hosing or to water coming from any direction. The box and cover are made from 16 GA (Type 304) stainless steel with all seams continuously welded. A high quality robotically poured-in-place seamless gasket ensures a complete

and durable water tight seal. The opening has a curled lip around all sides to prevent dripping water from entering when the door is open, it also increases rigidity. A flange-mounted ¼ turn lock ensures positive closing while leaving a full workable mounting surface on the door. The enclosure can be internally mounted or externally mounted using the included die cast wall mounting feet. **Each enclosure comes**

**complete with a 14 GA steel flat inner panel** which mounts on welded nuts. The enclosures' exterior are unpainted and brushed smooth. The enclosures' interior and panels are finished with white heat fused polyester powder, electrostatically applied on a pretreated base.

**CSA Certified / UL Listed  
NEMA/EEMAC 4X / IP66**

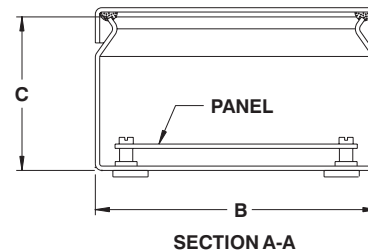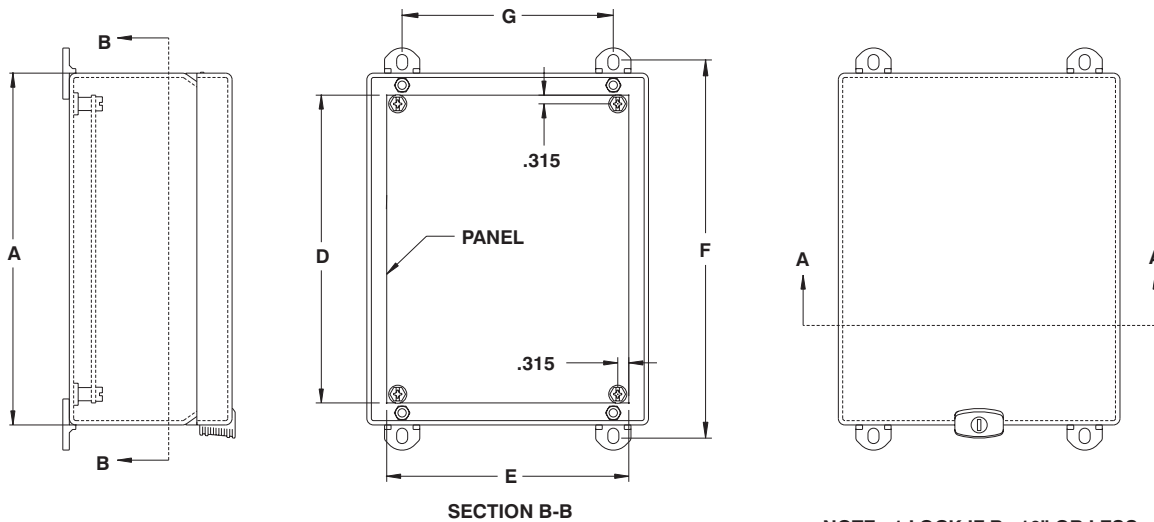

CATALOG NUMBER	DIMENSIONS							SHIP WGT LBS.
	A	B	C	D	E	F	G	
5412 ESSLC040403	4	4	3	No.Pan.	No.Pan.	4.75	2	2
5412 ESSLC060403	6	4	3	4.88	2.88	6.75	2	3
5412 ESSLC060404	6	4	4	4.88	2.88	6.75	2	4
5412 ESSLC060604	6	6	4	4.88	4.88	6.75	4	5
5412 ESSLC080604	8	6	4	6.88	4.88	8.75	4	6
5412 ESSLC100804	10	8	4	8.88	6.88	10.75	6	10
5412 ESSLC121005	12	10	5	10.88	8.88	12.75	8	13
5412 ESSLC141206	14	12	6	12.88	10.88	14.75	10	19
5412 ESSLC161406	16	14	6	14.88	12.88	16.75	12	23
5412 ESSLC141208	14	12	8	12.88	10.88	14.75	10	20
5412 ESSLC161410	16	14	10	14.88	12.88	16.75	12	25

Data subject to change without notice.

